



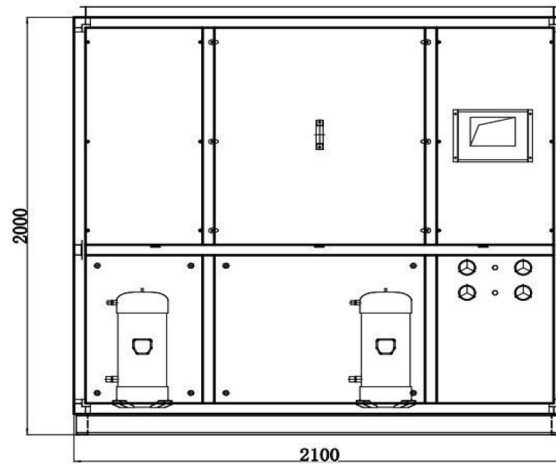

Specification		GA-30T
Total cooling capacity	MBH	392.5
	ton	32.7
Sensible cooling capacity	MBH	211.9
Total heat rejection	MBH	495.9
Dehumidification capacity	L/hr	64.5
	Pint/hr	136.1
	Gallon/hr	17.0
Supply air	cfm	8200
External static	Pa	200
Compressor consumption power	kW	30.3
Fan Motor consumption power	kW	3.6
Total consumption power	kW	33.9
Rated current	A	52.6
F.L.A	A	68.8
Power supply	V/Hz/Ph	460/60/3
Refrigerant	type	R410A
Air filter	type	MERV-8
Protections	type	Phase Protection, High/Low Pressure Protection, Overload Protection, Compressor staged start, Compressor Auto-Protection, Fan Motor Auto-Protection
Condenser drain pipe diameter	inch	1 1/4
Net Weight	kg	900
Dimension(L*W*H)	mm	2100*1400*1950
Air cooling with air cooled condenser		
Total fan moter power	kW	2.4
Dimension(L*W*H)	mm	1300*460*1540
Net Weight	kg	100
Quantity to dehumidification system	Pcs	2

Drawings:

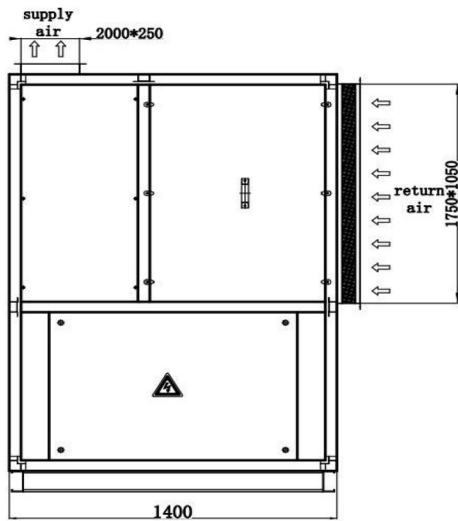

Air cooled condenser

