




| Specification                                |           | GA-05T  |
|--|-----------|---|
| Total cooling capacity                       | MBH       | 73.0  |
|  | ton       | 6.1   |
| Sensible cooling capacity                    | MBH       | 39.2  |
| Total heat rejection                         | MBH       | 93.9  |
| Dehumidification capacity                    | L/hr      | 11.9  |
|  | Pint/hr   | 25.1  |
|  | Gallon/hr | 3.1   |
| Supply air                                   | cfm       | 1500  |
| External static                              | Pa        | 200   |
| Compressor consumption power                 | kW        | 6.1   |
| Fan Motor consumption power                  | kW        | 0.9   |
| Total consumption power                      | kW        | 7.0   |
| Rated current                                | A         | 10.4  |
| F.L.A  | A         | 14.5  |
| Power supply                                 | V/Hz/Ph   | 460/60/3  |
| Refrigerant                                  | type      | R410A   |
| Air filter                                   | type      | MERV-8  |
| Protections                                  | type      | Phase Protection, High/Low Pressure Protection, Overload Protection, Compressor staged start, Compressor Auto-Protection, Fan Motor Auto-Protection |
| Condenser drain pipe diameter                | inch      | 3/4   |
| Net Weight                                   | kg        | 250   |
| Dimension(L*W*H)                             | mm        | 800*800*1900  |
| <b>Air cooling with air cooled condenser</b> |           |   |
| Total fan moter power                        | kW        | 1.0   |
| Dimension(L*W*H)                             | mm        | 960*370*1260  |
| Net Weight                                   | kg        | 60  |
| Quantity to dehumidification system          | Pcs       | 1   |

Drawings:

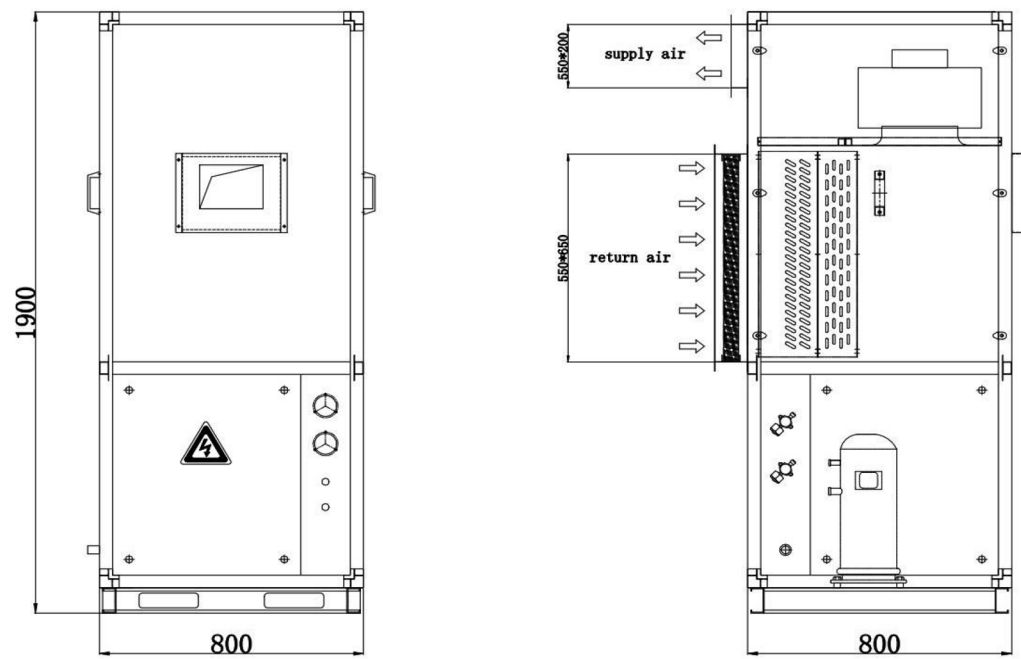

Air cooled condenser

