
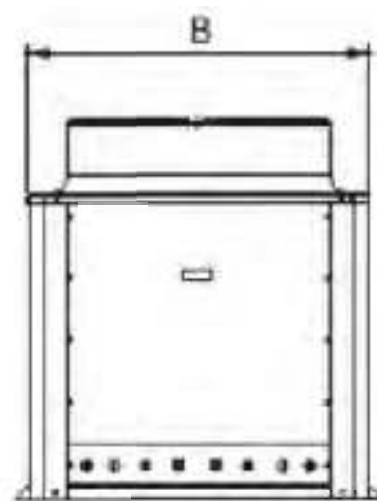


Model No.		TCA3TDHVACHGRH2401P	
Nominal cooling capacity	KW	38.3	
	RT	10.9	
Power Input	KW	10.2	
EER (Btu/W.h)	/	12.8	
Power Supply	/	1/N/PE AC240V±10% 60HZ	
Refrigerant Gas	/	R32	
Rated Cooling Running Current	A	12	
Min. Start Current	A	14.4	
Connection	Suction	in	5/8
	Liquid Reheat	in	1/2
	Liquid	in	3/8
Outdoor Condenser Unit	Condenser Type	/	Air Cooled Copper Pipes & Aluminum Fins Type Heat Exchanger
	Compressor Type	/	Hermetic Scroll Type
	Compressor Quantity	PCS	1
	Fan Type and Quantity	PCS	Axial fans/1
	Fan Flow Rate	CFM	4750
	Length-A	in	30
	Width-B	in	30
	Height-C	in	43
	Weight	lbs	194
	Noise	dB(A)	≤60


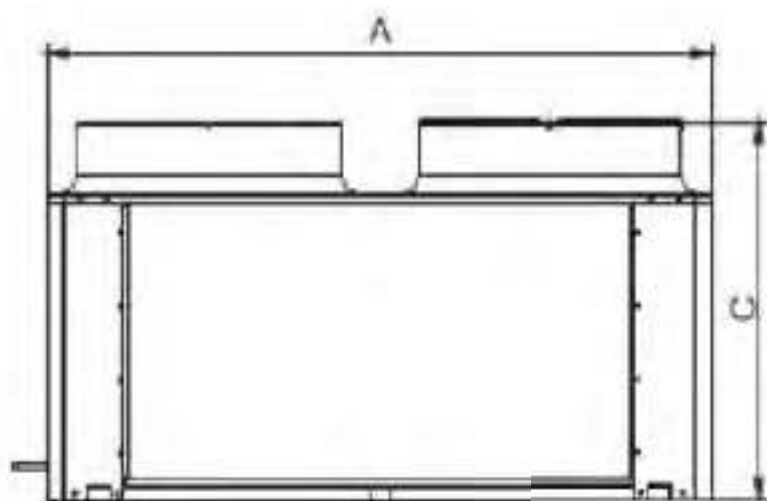


Cultivated Solutions For Optimal Growth

400 N St. Paul Dallas, Tx 75201 sales@tricleanair.com

Ph: (972) 656-9032 - WWW.TRICLEANAIR.COM

Model No.		TCA3TDHVACHGRHAHU2401P	
Nominal cooling capacity	KW	38.3	
	RT	10.9	
Power Input	KW	1.6	
P/kWH	/	33.3	
Power Supply	/	1/N/PE AC240V±10% 60HZ	
Refrigerant Gas	/	R32	
Rated Cooling Running Current	A	1.8	
Min. Start Current	A	2.25	
Connection	Suction	in	5/8
	Liquid Reheat	in	1/2
	Liquid	in	3/8
Indoor Evaporator Unit	Direct Expansion Cooling Coil	/	Copper Pipes & Aluminum Fins Type Heat Exchanger for Refrigerant Gas
	Direct Expansion Re-Heat Coil	Type	Copper Pipes & Aluminum Fins Type Heat Exchanger for Hot Gas ReHeat
		BTU	27,000
	Fan Type and Quantity	PCS	Centrifugal fans/ @ 450 watts each
	Fan Flow Rate	CFM	2500
	External Static Pressure	Pa	300
	Drain Pipe	in	1
	Length-L	in	32
	Width-W	in	45
	Height-H	in	28
	Weight	lbs	220
	Noise	dB(A)	≤60

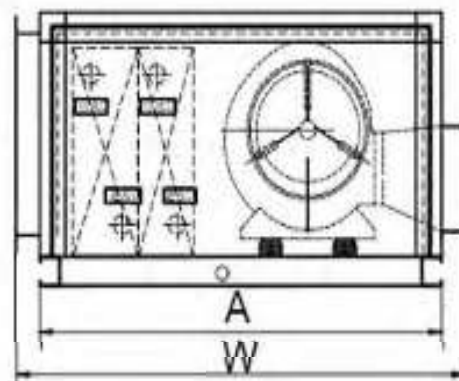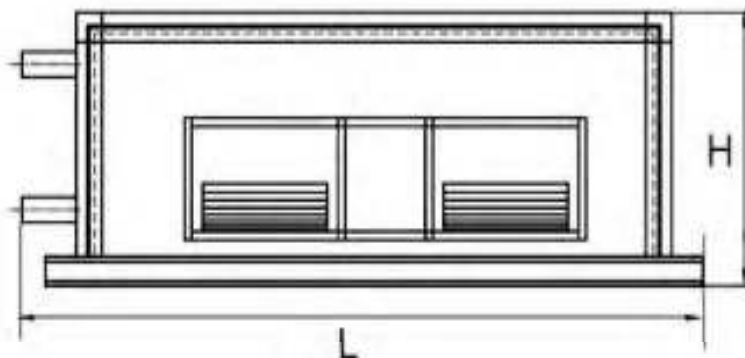

Cultivated Solutions For Optimal Growth

400 N St. Paul Dallas,Tx 75201 sales@tricleanair.com

Ph: (972) 656-9032 - WWW.TRICLEANAIR.COM