
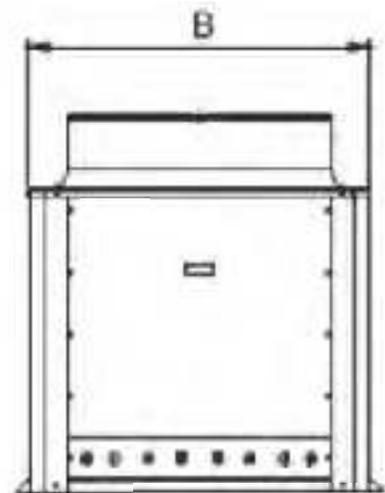


Model No.		TCA10TDHVACHGRH2403P		
Nominal cooling capacity	KW	38.3		
	RT	10.9		
Power Input	KW	10.2		
EER (Btu/W.h)	/	12.8		
Power Supply	/	3/N/PE AC240V±10% 60HZ		
Refrigerant Gas	/	R32		
Rated Cooling Running Current	A	36.4		
Min. Start Current	A	43.7		
Connection	Suction	in	1-1/8	
	Liquid Reheat	in	7/8	
	Liquid	in	5/8	
Outdoor Condenser Unit	Condenser Type	/	Air Cooled Copper Pipes & Aluminum Fins Type Heat Exchanger	
	Compressor Type	/	Hermetic Scroll Type	
	Compressor Quantity	PCS	2	
	Fan Type and Quantity	PCS	Axial fans/2	
	Fan Flow Rate	CFM	10,750	
	Length-A	in	58	
	Width-B	in	30	
	Height-C	in	43	
	Weight	lbs	396	
Noise	dB(A)	≤71		


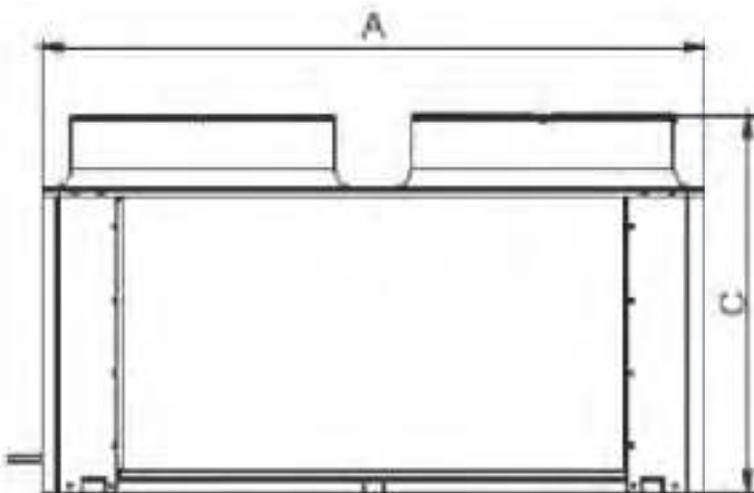


Cultivated Solutions For Optimal Growth

400 N St. Paul Dallas, Tx 75201 sales@tricleanair.com

Ph: (972) 656-9032 - WWW.TRICLEANAIR.COM

Model No.		TCA10TDHVACHGRHAHU2403P	
Nominal cooling capacity	KW	38.3	
	RT	10.9	
Power Input	KW	1.6	
P/kWH	/	36.33	
Power Supply	/	3/N/PE AC240V±10% 60HZ	
Refrigerant Gas	/	R32	
Rated Cooling Running Current	A	3	
Min. Start Current	A	5	
Connection	Suction	in	1-1/8
	Liquid Reheat	in	7/8
	Liquid	in	5/8
Indoor Evaporator Unit	Direct Expansion Cooling Coil	/	Copper Pipes & Aluminum Fins Type Heat Exchanger for Refrigerant Gas
	Direct Expansion Re-Heat Coil	Type	Copper Pipes & Aluminum Fins Type Heat Exchanger for Hot Gas ReHeat
		BTU	98,100
	Fan Type and Quantity	PCS	Centrifugal fans/ 2 @ 550 watts each
	Fan Flow Rate	CFM	6,000
	External Static Pressure	Pa	300
	Drain Pipe	in	1
	Length-L	in	48
	Width-W	in	46
	Height-H	in	28
Weight	lbs	335	
Noise	dB(A)	≤68	

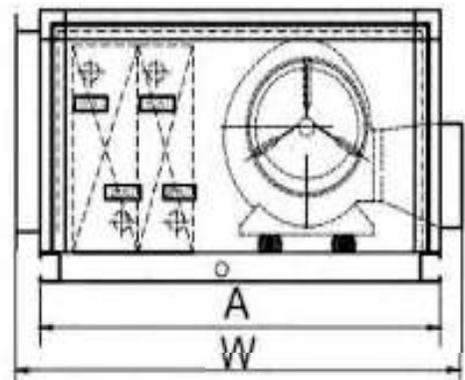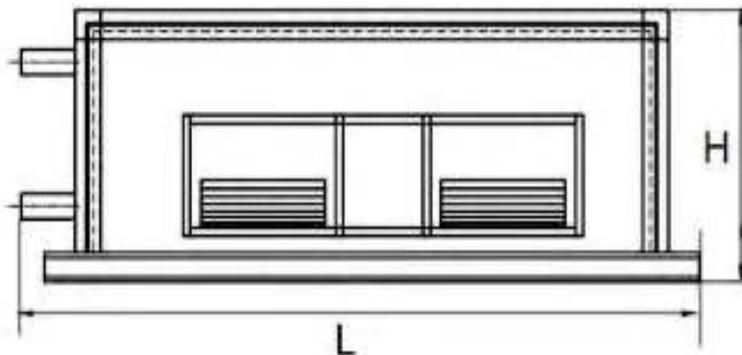

Cultivated Solutions For Optimal Growth

400 N St. Paul Dallas, Tx 75201 sales@tricleanair.com



Ph: (972) 656-9032 - WWW.TRICLEANAIR.COM